


Specification Data	
Job Name	
Type	
Catalog #	
Comments	

PRODUCT OVERVIEW

The DIM10-087-06-IP(W) embedded wireless controller opens an exciting integration path for LED Luminaires. The smaller size and lower cost make this DC-powered wireless controller versatile enough to be externally mounted with nearly any wattage LED Luminaire.

Pairing the DIM10-087-06-IP(W) with a SimplySnap Site Controller makes it easy to comply with ASHRAE 90.1, Title 24, DLC NLC Indoor/Outdoor, and other energy requirements today and in the future.

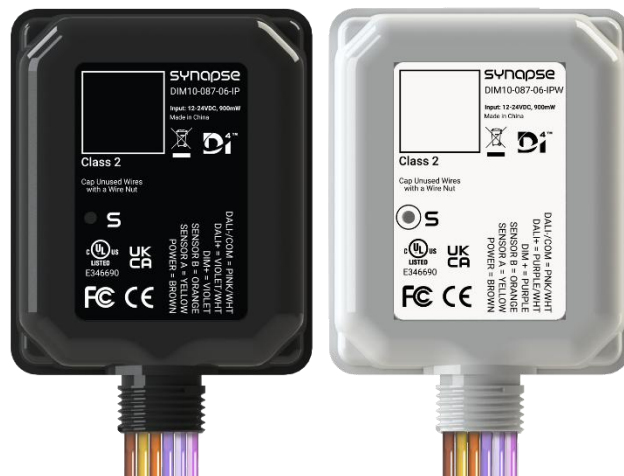

Product #	Description
DIM10-087-06-IP	Wireless Lighting Controller, internal antenna, IP66, Black
DIM10-087-06-IPW	Wireless Lighting Controller, internal antenna, IP66, White

KEY FEATURES:

- Seamless SimplySnap Integration
- Simplified DC Design – mates with LED Drivers
- Secure AES128 Encryption
- DLC Certification for both Indoor and Outdoor
- Self-healing 2.4GHz SNAP Mesh Networking
- Secure, over-the-air software upgrades
- 2 Sensor Inputs: DC Motion and 0-10V Photocells
- IP66 rated for indoor and outdoor applications

IEC 62386 DALI-2 Certified – D4i Certified

- DALI-2 Certified DATA Bus – Part 101
- D4i Power Monitoring – Part 252
- D4i – Type D – Single-Master Controller – Part 351
- DALI-2 Linear Dimming, ON/OFF – Part 218
- Compatible with these DALI-2 Sensors:
 - WattStopper FDP-301
 - TE Lumawise
- RGBA Color Support
- Requires DALI Power Supply on D4i Driver
- Requires D4i Aux Power Supply

DIM to OFF LED Drivers

- 0-10V Dimming, ON/OFF
- No Power Monitoring
- Powered via LED Driver Aux Power

Note – LED Driver must support DIM to OFF functionality

SPECIFICATIONS:


Dimensions	3.7" x 2.8" x 0.9" See Mechanical Datasheet for Engineering dimensions
Input Power	12-24 VDC +/- 10%, 900mW max
Temperature	-40°C to +80°C
IP Rating	IP66
Wire Size	18AWG, 15" Wires, 600V
Dimming	0-10V, 10mA Source/Sink (Max) or D4i Dimming
Sensor Input	Analog: 0-10V Digital: 0-24V (Software selectable)
Radio	SNAP 2.4GHz; 802.15.4 +20 dBm Transmit Power -103 dBm Receive Sensitivity
D4i LED Drivers	Limited to 4 D4i LED Drivers
Certifications	c(UL)us; FCC/IC; CE; UKCA; DLC - Indoor/Outdoor; DALI-2 - D4i Certification
Warranty	5 Years

1. Maximum of 4 LED Drivers per controller, consult Synapse Support if a greater ratio is needed.
2. See <http://www.synapsewireless.com/warranty> for warranty terms



To learn more visit: synapsewireless.com

WIRING DIAGRAM EXAMPLES

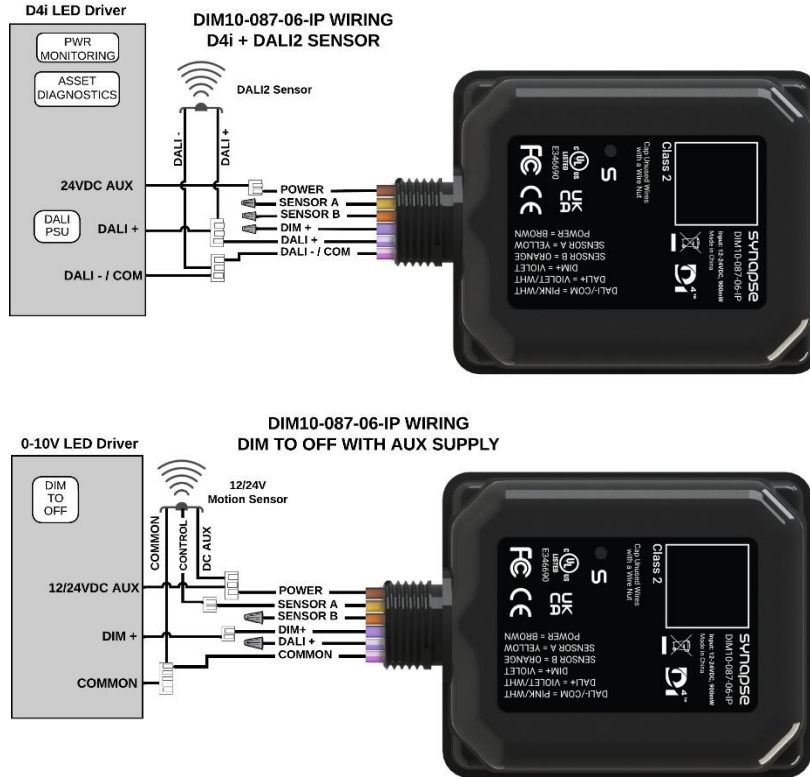

STATUS LED (when powered)

COLOR	DESCRIPTION
RED	No Network Found (Communication Lost)
BLINKING GREEN	Network Found, Controller Not Configured (Device not yet added to SimplySnap)
GREEN	Network Found, Controller Configured (Normal Operation)

SIGNAL/WIRE COLORS

SIGNAL	WIRE COLOR
DALI-/COMMON	PINK/WHITE STRIPE
DALI+	VIOLET/WHITE STRIPE
DIM+	VIOLET
SENSOR INPUT B	ORANGE
SENSOR INPUT A	YELLOW
POWER	BROWN

NOTE: Cap unused wires with a wire nut!

SimplySnap Site Controller Options (required for all deployments)

PART NUMBER	DESCRIPTION	APPLICATION
SS450-002	SimplySnap, WiFi, Verizon LTE, Industrial Metal Enclosure	Indoor
CBSSW-450-002	Central Base Station, SS450-based Model with 5-button switch and NEMA 4X enclosure	Indoor/Outdoor

Patented – Virtual marking at <https://www.synapsewireless.com/about/patents>